




PWR Micro Series

Radio Remote Controls

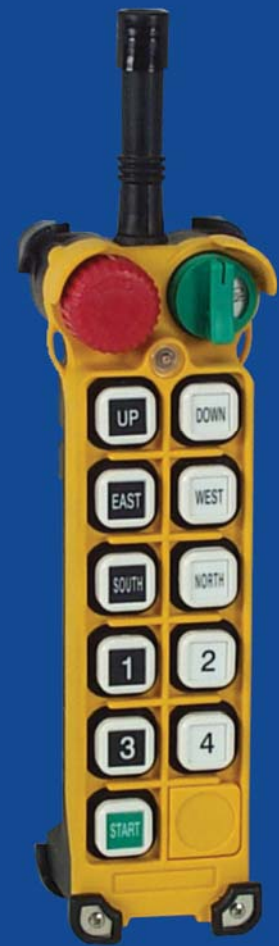

Driving The Future

- AC Variable Frequency Drives
- Engineered Systems
- Master Switches
- Pendant Stations
- Radio / Wireless Remote Controls
- Variable Frequency Drive Accessories

KEY FEATURES

- Dual transmitters standard with all systems
- 76 communication channels (Crystal)
- IP65 protection (NEMA 4 type)
- Glass fiber-reinforced nylon-6 receiver / transmitter casings
- 300 and 400 MHz frequency (depending on model)
- Operating temperature – 31°F to 167°F (-35°C to 75°C)
- Auto-shut-down (programmable)
- Optional antenna extension for longer control range (up to 1500 ft)
- Optional quick connect plugs
- No license required
- FCC approved

TRANSMITTER SPECIFICATIONS

- Single and two-step buttons (three step capability using start button)
- Up to 10 button configurations
- Controls up to 5 motions (or other configurations)
- E-stop button (except PWRM-21-2)
- Removable on/off/start key switch (except PWRM-21-2)
- Lightweight design
 - 5 oz (PWRM-21-2)
 - 9 oz (PWRM-21-4 & 6)
 - 11 oz (PWRM-24)
- Battery LED indication
- 2 million push button cycle
- Control range
 - 150 ft (PWRM-21-2)
 - 250 ft (PWRM-21-4 & 6)
 - 500 ft (PWRM-24)
- 2AA alkaline batteries
- Transmitter protective nylon case
- 2 style legend sheets (custom available)

RECEIVER SPECIFICATIONS


- Compact and lightweight
- Supply voltage 110/220 VAC (other available)
- 10 A @ 250 VAC rated relays
- Pre-wired receivers with 10 ft cable



PWRM-24



PWRM-21

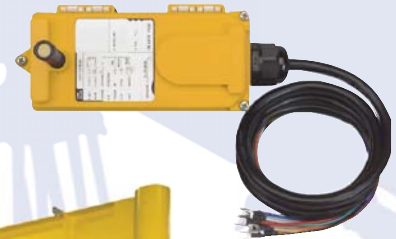

www.drivecon.com

820 Lakeside Drive, Gurnee, IL 60031-9165
Toll Free: 1-800-374-8266 | Phone: 847-855-9150
Fax: 847-855-9650 | drive.sales@drivecon.com

